



SELECTIVE CALLING USING D-STAR GATEWAYS

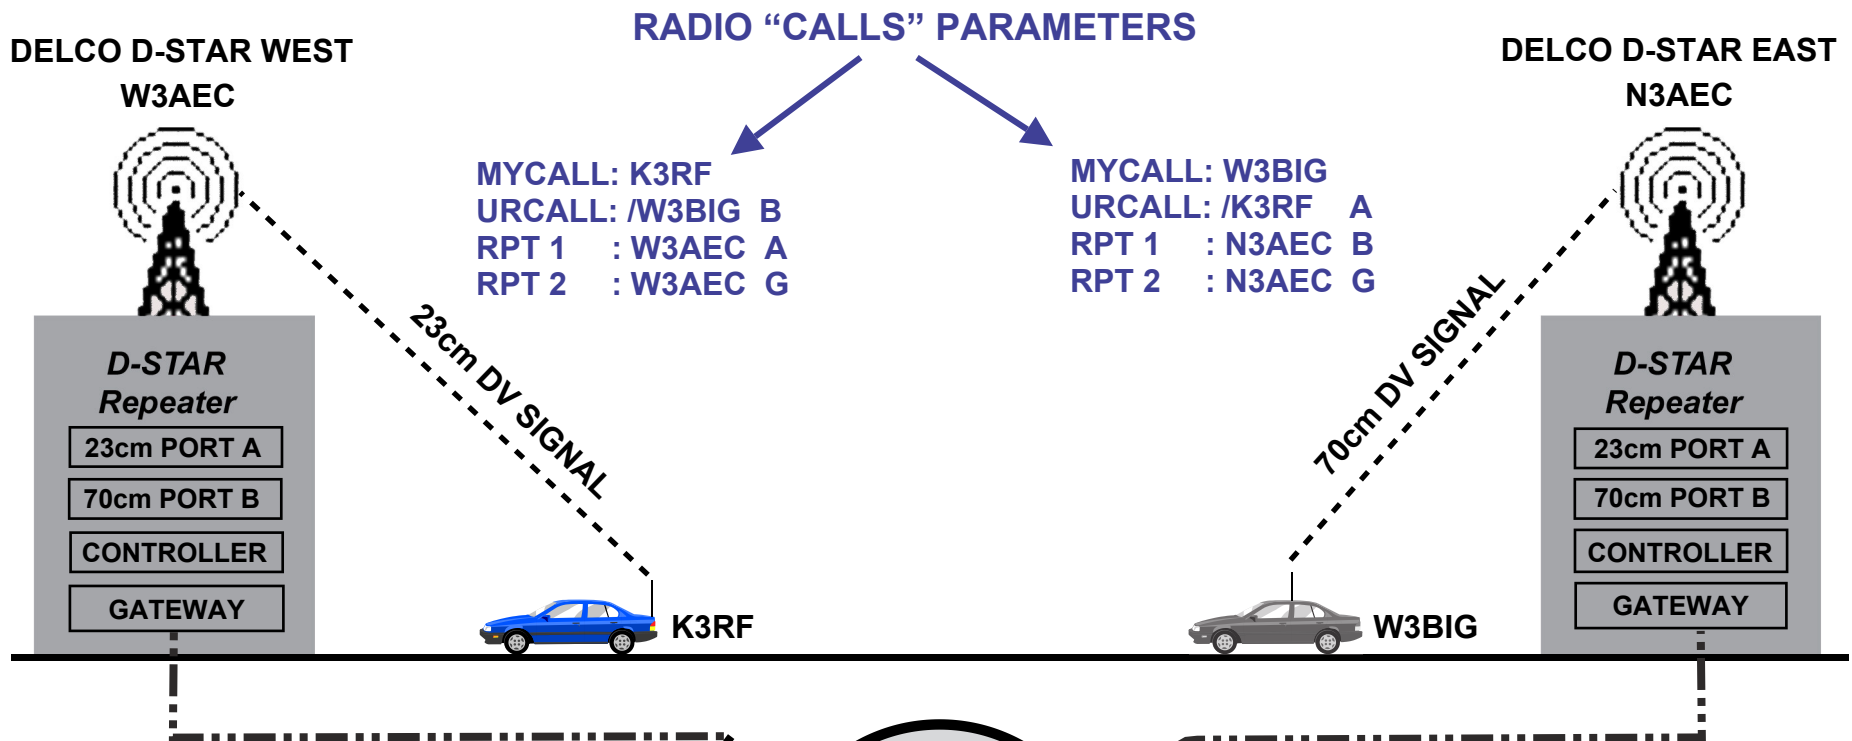

SELECTIVE CALLING VIA GATEWAYS

In the example above K3RF, operating on 23cm on the W3AEC repeater, places a call to W3BIG, who is operating on 70cm on the N3AEC repeater. K3RF routes his call through W3AEC using port A as RPT 1. He routes his call through the gateway by using W3AEC port G as RPT 2 to send the call to W3BIG via internet linking. The D-STAR routing system locates W3BIG on the N3AEC repeater, port B, and sends the call. W3BIG receives the call on 70cm.



D-STAR REPEATER PORTS

- A: 23 cm (1200 Mhz)
- B: 70cm (440 Mhz)
- C: 2m (146 Mhz)
- G: GATEWAY