


# SELECTIVE CALLING USING D-STAR GATEWAYS

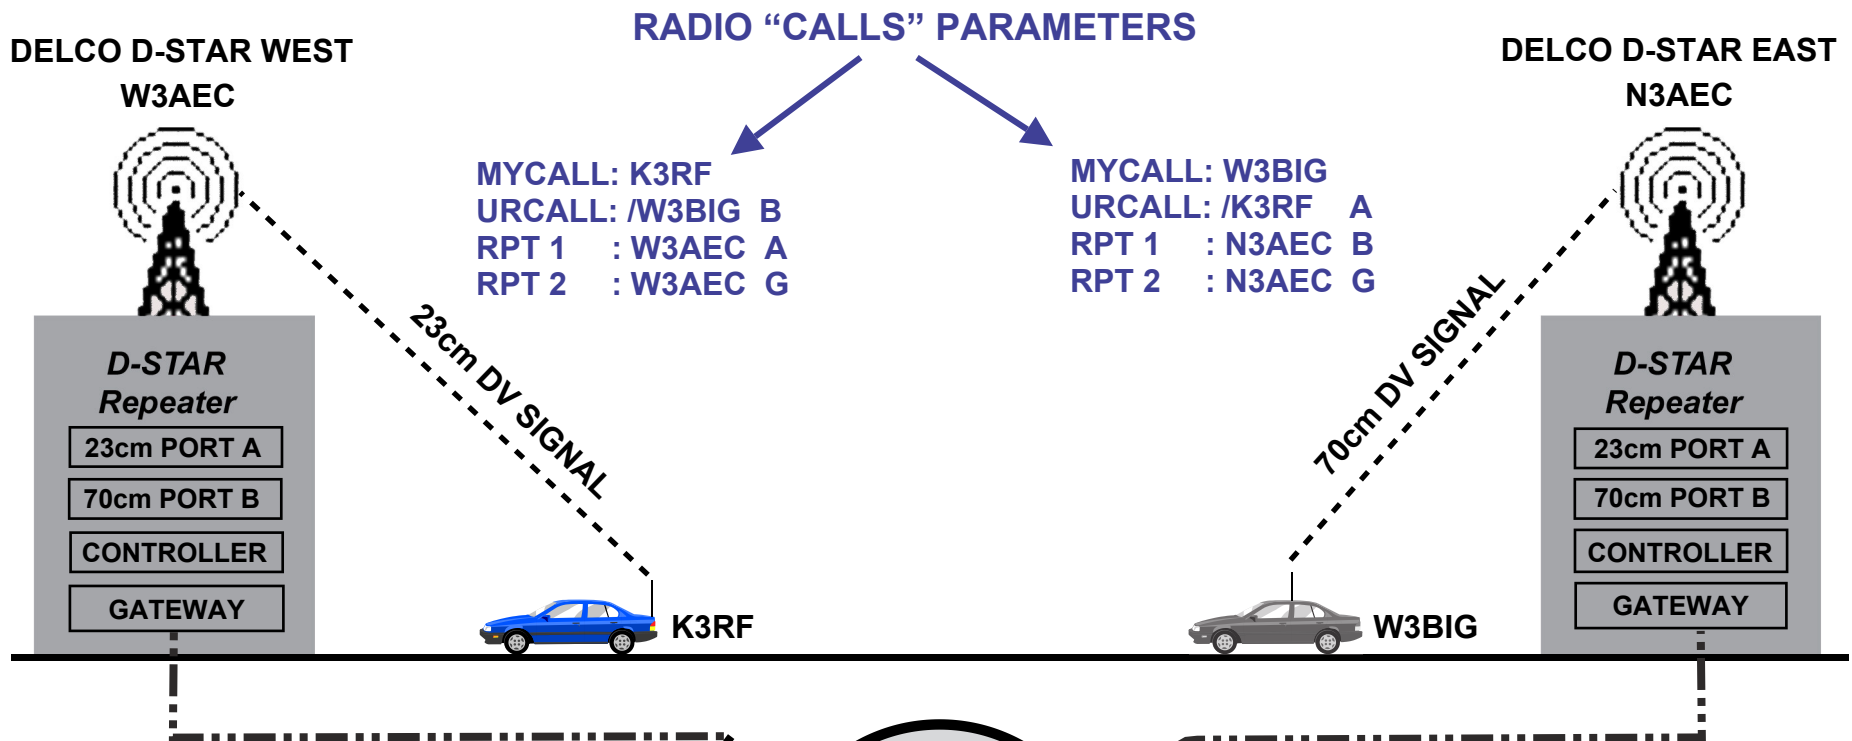

## SELECTIVE CALLING VIA GATEWAYS

In the example above K3RF, operating on 23cm on the W3AEC repeater, places a call to W3BIG, who is operating on 70cm on the N3AEC repeater. K3RF routes his call through W3AEC using port A as RPT 1. He routes his call through the gateway by using W3AEC port G as RPT 2 to send the call to W3BIG via internet linking. The D-STAR routing system locates W3BIG on the N3AEC repeater, port B, and sends the call. W3BIG receives the call on 70cm.

## D-STAR REPEATER PORTS

A: 23 cm ( 1200 Mhz )  
B: 70cm ( 440 Mhz )  
C: 2m ( 146 Mhz )  
G: GATEWAY